



PRODUCT SPECIFICATION

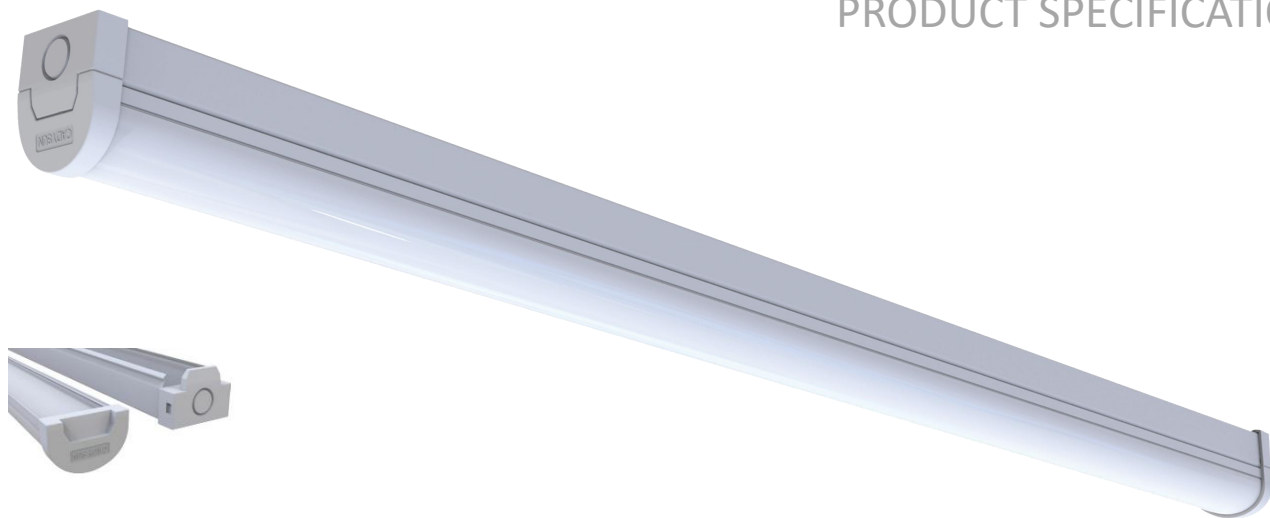

Features & Benefits

- Intelligent press release buttons for simple installation
- Suspended LED tray for easy installation
- Press fit terminals loop in loop out with multiple position options
- Rear and end conduit entry points
- Flexible cross mount fixing points
- Pre-moulded two way cable restraints
- Improved funnel clip in end caps for ease of installation
- 3 or 5 years warranty



Applications



Canteen
Commercial
Offices
Corridor
Education

Stairwell
Store Room
Transport
Warehouse
Storage

Specification



Product	LED Batten Light
CRI	>80
IP Rating	IP20
Beam Angle	120°
Voltage	200-240V 50/60Hz
Efficacy	115 lm/w
Materials	Pressed steel based and polycarbonate diffuser

Ordering Code	Dimension	Watt	Lumens
POF120CL	1170x62x74mm	38W	4400lm
POF125CL	1460x62x74mm	57W	6500lm
POF180CL	1750x62x74mm	70W	8000lm