



PRODUCT SPECIFICATION

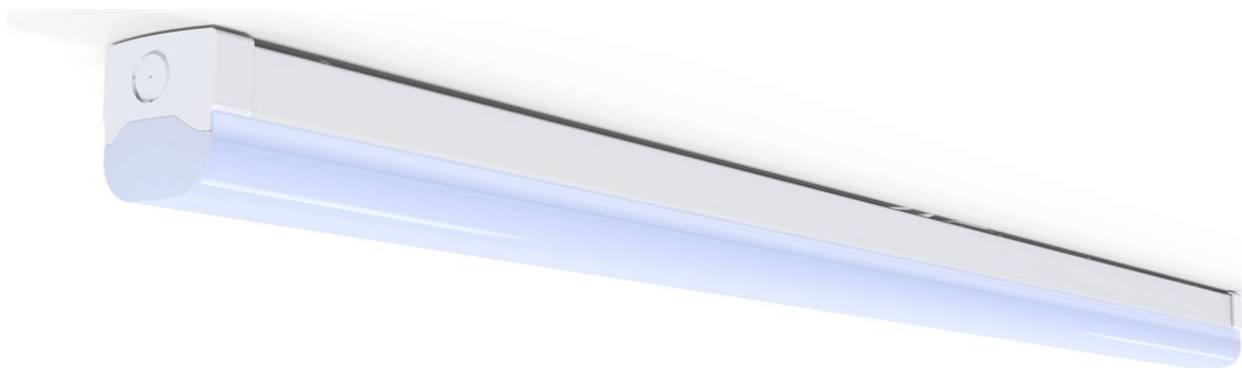

Features & Benefits

- Intelligent press release buttons for simple installation
- Suspended LED tray for easy installation
- Press fit terminals loop in loop out with multiple position options
- Rear and end conduit entry points
- Flexible cross mount fixing points
- Fast-Fix Hinged Screwless Diffuser
- Multiple rear and side cable or conduit entry points
- Double insulated, lightweight, versatile and Slimline
- 3 or 5 years warranty



Applications



Canteen
Commercial
Offices
Corridor
Education

Stairwell
Store Room
Transport
Warehouse
Storage

Specification



Product	LED Batten Light
CRI	>80
IP Rating	IP20
Beam Angle	120°
Voltage	200-240V 50/60Hz
Efficacy	115 lm/w
Materials	Pressed steel based and polycarbonate diffuser

Ordering Code	Dimension	Watt	Lumens
POF060CSL	634.5x61.5x62mm	20W	2300lm
POF120CSL	1171x61.5x62mm	40W	4600lm
POF150CSL	1471x61.5x62mm	40W	5750lm