




### PRODUCT SPECIFICATION

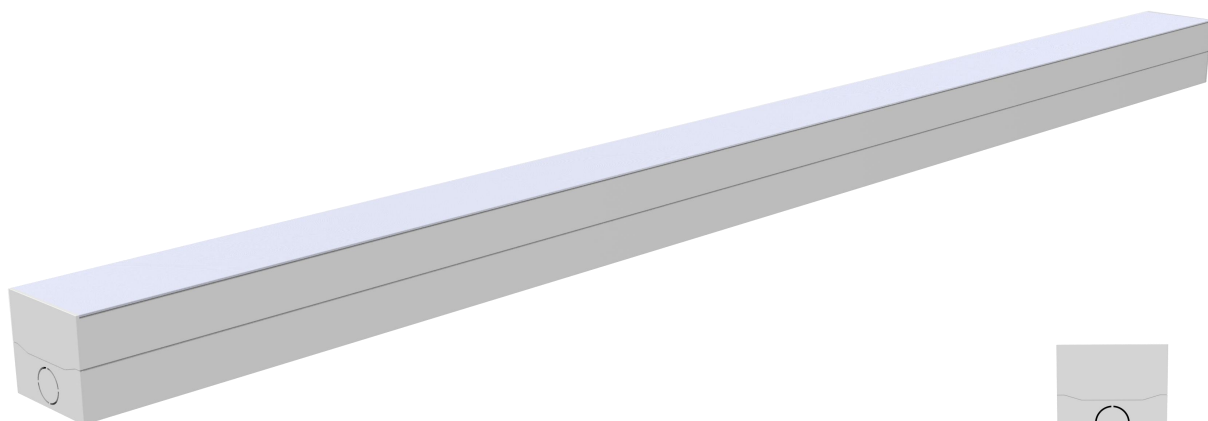

#### Features & Benefits

- Intelligent press release buttons for simple installation
- Suspended LED tray for easy installation
- Steel body, white gloss powder coated finish
- Rear and end conduit entry points
- Flexible cross mount fixing points
- Pre-moulded two way cable restraints
- UV stable polycarbonate controller and end-caps
- 3 or 5 years warranty



#### Applications



Canteen  
Commercial  
Offices  
Corridor  
Education

Stairwell  
Store Room  
Transport  
Warehouse  
Storage

#### Specification



Product	LED Batten Light
CRI	>80
IP Rating	IP20
Beam Angle	120°
Voltage	200-240V 50/60Hz
Efficacy	130 lm/w
Materials	Robust steel based and polycarbonate diffuser

Ordering Code	Dimension	Watt	Lumens
POF120ML	1200x65x60mm	20/40W	2600/5200lm
POF125ML	1500x65x60mm	25/50W	3250/6500lm
POF180ML	1200x65x60mm	30/60W	3900/7800lm