

# *PRILLUMEN*

## Skyline Linear Lighting


“Design without limits. Illuminate without compromise”



## COLLECTION

Ceiling | Recessed | Pendant



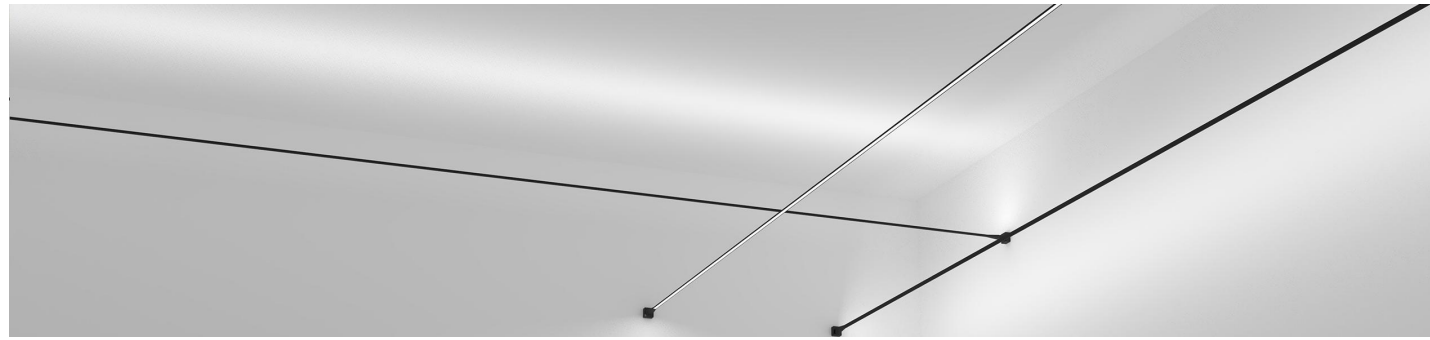


[info@prillum.com](mailto:info@prillum.com)






## ✓ Key Features:

- Sleek Architectural Design – Ultra-slim profile blends seamlessly into modern interiors.
- Continuous Light Lines – Uniform illumination with no visible dark spots.
- Flexible Mounting Options – Surface, suspended, and recessed installation.
- Custom Lengths – Modular system adapts to different room sizes and layouts.
- Energy-Efficient LED Technology – High lumen-per-watt performance with long lifespan.
- Low Glare Illumination – Optics designed for visual comfort in work and leisure spaces.


## Applications

-  Corporate Offices – Continuous lines of light for open-plan workspaces and meeting rooms.
-  Hotels & Hospitality – Warm, welcoming ambience in lobbies, corridors, and guest suites.
-  Retail Spaces – Accent and general lighting that enhances product displays.
-  Residential Interiors – Minimalist lighting for kitchens, living rooms, and hallways.
-  Museums & Galleries – Even, glare-free illumination for art and exhibitions.

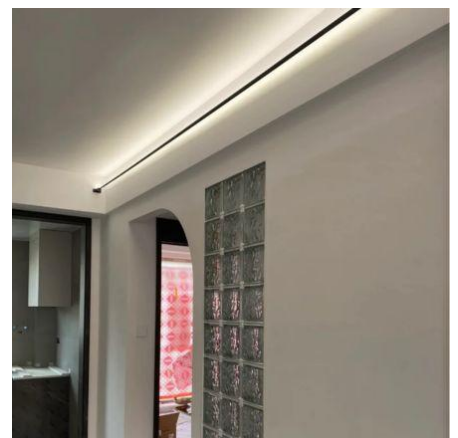
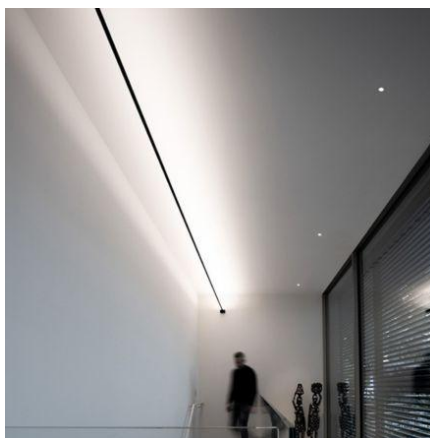
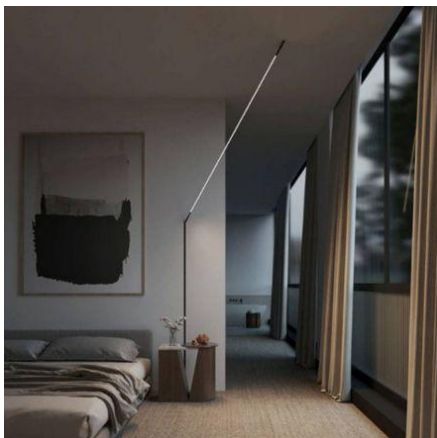


## Skyline Light Specification

Model	SKL-01-X(X=length)
Length	5,6,7,8, 9 meter- custom
Width	21mm
Height	4mm
LED Voltage	DC 24V
Input Voltage	AC180-240V
Power	10W/Meter
CRI	90
CCT	30-40-50-60K
Beam Angle	120°
Finish	White, Black, Custom

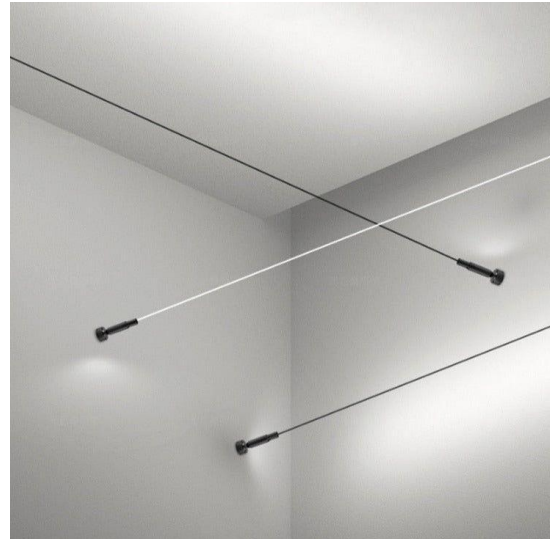

## Component Details

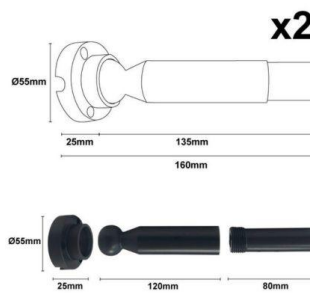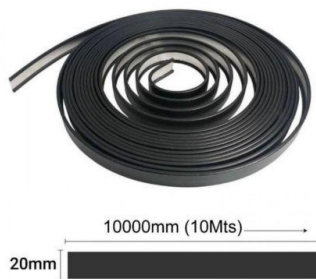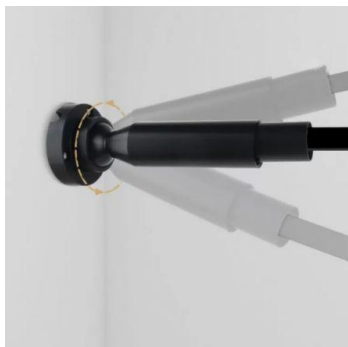

## Spotlight



Model	SKL-S01
Dimension	φ45x94mm
Wattage	7W(80lm/w)
Material	Aluminum
Voltage	DC 24V
CRI	90
CCT	NW, WW, CW
Beam Angle	24°
Finish	White, Black, Custom

## Adjustable Spotlight



Model	SKL-S02
Dimension	φ15x107x142mm
Wattage	7W(80lm/w)
Material	Aluminum
Voltage	DC 24V
CRI	90
CCT	NW, WW, CW
Beam Angle	24°
Finish	White, Black, Custom

## Ball Light



Model	SKL-B01
Dimension	φ80x120mm
Wattage	2.4W(80lm/w)
Material	Aluminum+PC
Voltage	DC 24V
CRI	90
CCT	NW, WW, CW
Beam Angle	180°
Finish	White, Black, Custom

## Spot Optic lens Blade



Model	SKL-B02
Dimension	20x2x4mm
Wattage	10W(80lm/w)
Material	Aluminum
Voltage	DC 24V
CRI	90
CCT	NW, WW, CW
Beam Angle	24°
Finish	White, Black, Custom