




Ring Accessories Options:



Technical Data

Model	Power	Lumens	CRI	Voltage	Beam Angle
PR-19C20B	20W	1,930lm	90	180-265V AC	15/24/38/45/60°
PR-19C30B	30W	2,270lm	90	180-265V AC	15/24/38/45/60°
PR-19C40BT	40W	3,690lm	90	180-265V AC	15/24/38/45/60°
PR-19C20BT	20W	1,930lm	90	180-265V AC	15/24/38°
PR-19C30BT	30W	2,270lm	90	180-265V AC	15/24/38°
PR-19C40BT	40W	3,690lm	90	180-265V AC	15/24/38°

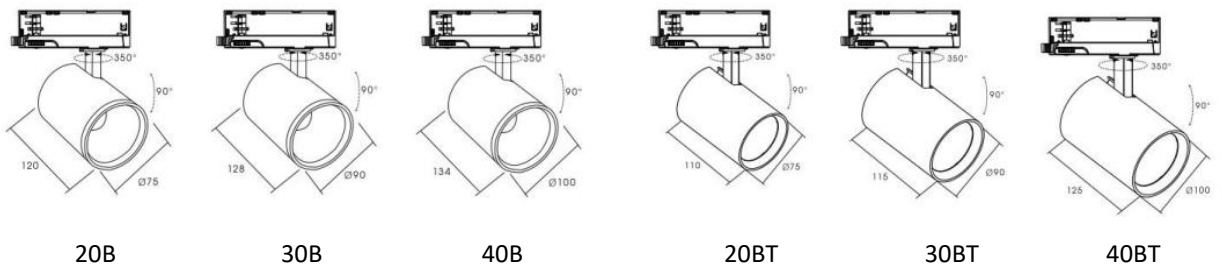



Ring Accessories Options:



Technical Data

Model	Power	Lumens	CRI	Voltage	Beam Angle
PR-21D12A	10W	1,050lm	90	180-265V AC	15/24/38/60°
PR-21D12B	10W	1,050lm	90	180-265V AC	15/24/38°
PR-21D12C	10W	1,050lm	90	180-265V AC	15/24/38/45/60°
PR-21D20A	18W	1,890lm	90	180-265V AC	15/24/38/60°
PR-21D20B	15W	1,575lm	90	180-265V AC	15/24/38°
PR-21D20C	18W	1,890lm	90	180-265V AC	15/24/38/45/60°
PR-21D30A	28W	2,940lm	90	180-265V AC	15/24/38/60°
PR-21D30B	24W	2,520lm	90	180-265V AC	15/24/38°
PR-21D30C	28W	2,940lm	90	180-265V AC	15/24/38/45/60°
PR-21D40A	38W	3,990lm	90	180-265V AC	15/24/38/60°
PR-21D40B	34W	3,570lm	90	180-265V AC	15/24/38°
PR-21D40C	38W	3,990lm	90	180-265V AC	15/24/38/45/60°

